### (19) World Intellectual Property Organization

International Bureau



## ) <u>1888) 1889) 1889) 1889</u> | 1890 | 1890 | 1891 | 1892 | 1893 | 1893 | 1894 | 1894 | 1894 | 1895 | 1894 | 1894 |

### (43) International Publication Date 8 April 2004 (08.04.2004)

PCT

# (10) International Publication Number WO 2004/028785 A1

(51) International Patent Classification<sup>7</sup>: B64C 3/26

B29C 65/54,

(21) International Application Number:

PCT/GB2003/004183

(22) International Filing Date:

25 September 2003 (25.09.2003)

(25) Filing Language:

English

(26) Publication Language:

**English** 

(30) Priority Data:

0222288.3

25 September 2002 (25.09.2002) GB

(71) Applicant (for all designated States except US): AIRBUS UK LIMITED [GB/GB]; New Filton House, Filton, Bristol BS99 7AR (GB).

(72) Inventor; and

- (75) Inventor/Applicant (for US only): PRIDIE, Jago [GB/GB]; 14 Belgrave Crescent, Bath BA1 5JU (GB).
- (74) Agents: PEARSON, James, Ginn et al.; Abel & Imray, 20 Red Lion Street, London WC1R 4PQ (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,

RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declaration under Rule 4.17:


as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

### Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR JOINING AIRCRAFT COMPONENTS

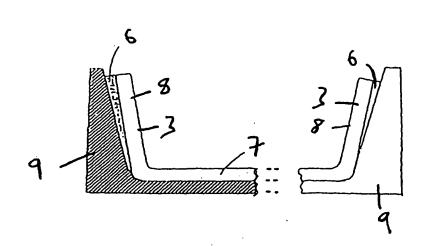

(57) Abstract: The surface of a moulding tool (9), for receiving a first aircraft component, for example a spar (3), is shaped to correspond to the surface of a second aircraft component, for example a wing skin (5). A gap is defined between the tool (9) and the first component. Resin is drawn into the gap by a suction pump. The resin fills the gap and cures to form a shim (6). The first and second components, which are in the form of composite material structures, are then joined together without any significant voids being formed therebetween.

WO 2004/028785 A1